

NEMA TC FRAME MOTORS ON PACO VLS AND VSMS PUMPS

Key Features and Benefits

- Spacer coupling allows easy replacement of mechanical seal without removing motor, thus making installation easier and lowering maintenance costs
- Axially split coupling enhances ease of service and alignment
- Broad range of Industry-Standard TC motors are stocked by motor manufacturers
- TC motors are available at a competitive price, thus creating better customer value
- Significantly Improved Lead Time

For consulting engineers, visit GrundfosExpress.com for technical information. For Grundfos sales and distributors, visit GrundfosExpressSuite.com



VLS PUMP

[Shown with optional CI stand]


PACO VLS & VSMS Technical Data

	PACO VLS with TC motor
Flow, Q	10 to 4100 gpm
Head, H	15 to 420 ft
Fluid temp.	10° to 275° F
Max. working pressure	175 psi*
HP range	3 to 125 hp
Speed	3600, 1800, and 1200 RPM
Discharge/Suction sizes	1.25 to 8 in.

* 250 psi rating available

	PACO VSMS with TC motor
Flow, Q	10 to 4200 gpm
Head, H	15 to 450 ft
Fluid temp.	10° to 275° F
Max. working pressure	175 psi*
HP range	3 to 125 hp
Speed	3600, 1800, and 1200 RPM
Discharge/Suction sizes	4 to 10 in.

* 250 psi rating available

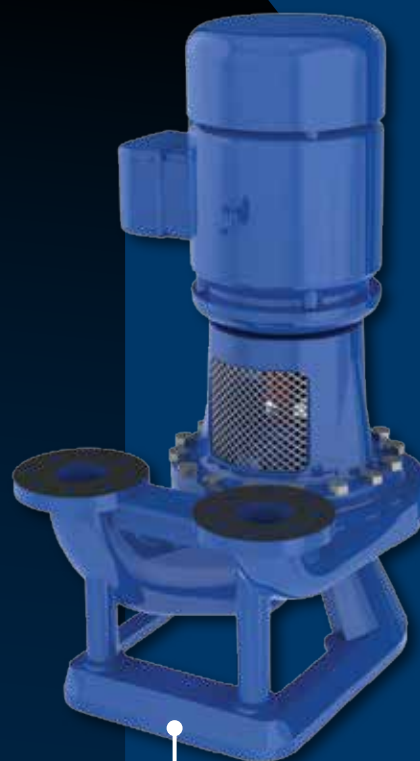

VSMS PUMP

L-VLS-SL-01 07-14 (US)

GRUNDFOS CBS Inc.
902 Koomey Road
Brookshire, TX 77423
Phone: (281) 994-2700
Fax: (559) 347-2702

GRUNDFOS Canada
2941 Brighton Road
Oakville, Ontario
L6H 6C9
Phone: (905) 829-9533
Fax: (905) 829-9512

GRUNDFOS Mexico
Boulevard TLC No. 15
Parque Industrial Stiva Aeropuerto
C.P. 66600 Apodaca, N.L. Mexico
Phone: 011-52-81-8144 4000
Fax: 011-52-81-8144 4010

www.grundfos.us

The name Grundfos, the Grundfos logo, and be think innovate are registered trademarks owned by Grundfos Holding A/S or Grundfos A/S, Denmark. All rights reserved worldwide.